


256 Kanal-Speicher

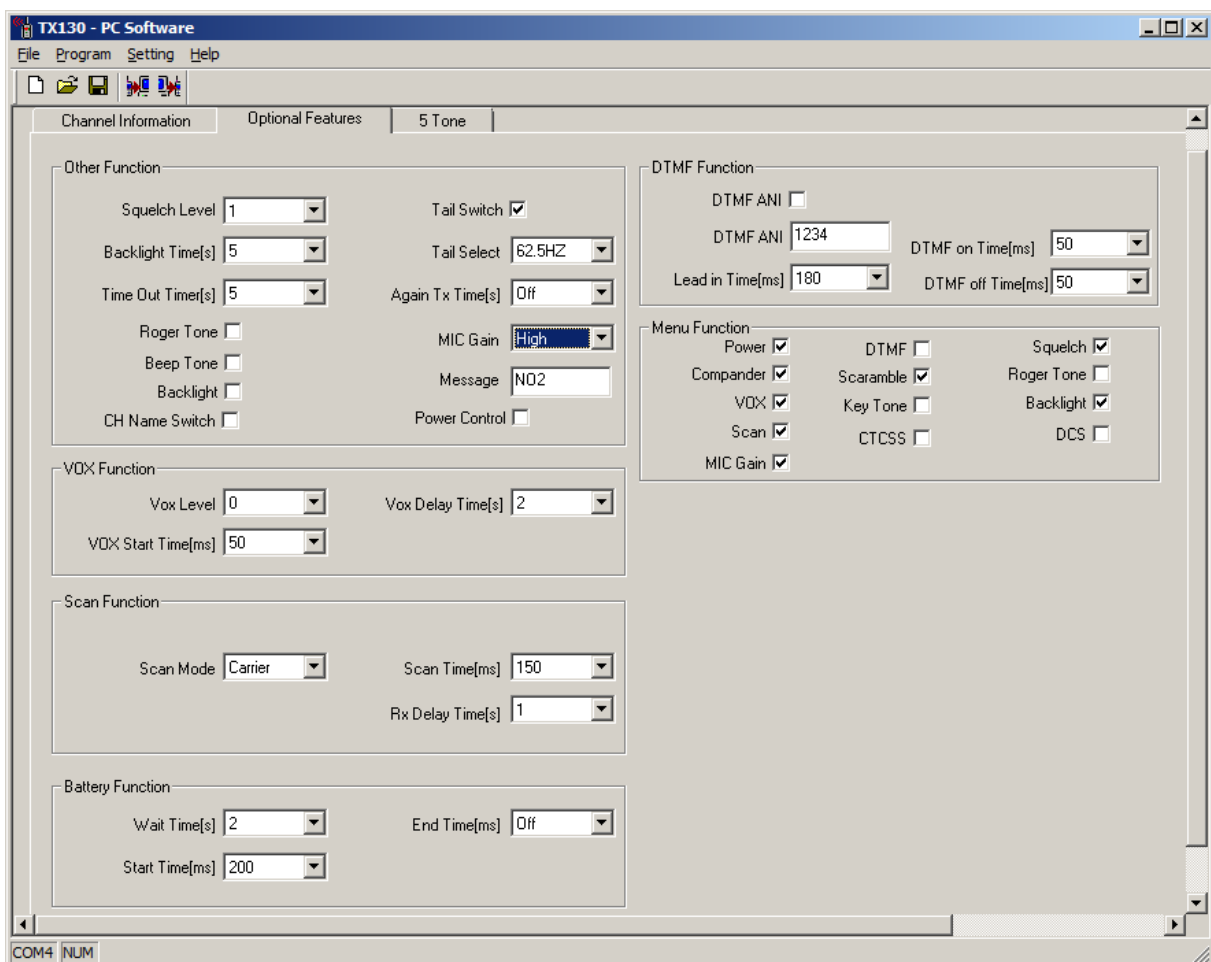

Squelch: 0 .. 5

Backlight Time[s]: 1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60

Time Out Time[s]: Off, 3, 5, 10, 15, 30, 45, 60, 90

Tail Select: 62.5Hz (Tectalk Duro), 56.5Hz, 55Hz (Midland)

MIC Gain: high, low

TX130 - PC Software

File Program Setting Help

Channel Information Optional Features **5 Tone**

5Tone Function:

☐ 5Tone ANI
☐ 5Tone Kill
☐ 5Tone Kill Active
☐ 5Tone Name Enable
 Tone Set: ZVEI2
 First Tone Time[ms]: 50
 Tone Generation Time[ms]: 50
 MY ID No.: 1
 Stun ID No.: 3
 Unstun ID No.: 4

No.	Name	ID
1	BS	07000
2	BH1	07010
3	BH2	07020
4	BH3	07030
5	BH4	07040
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		

COM4 NUM

No. Name/ID: 1 .. 30 (die eingetragenen Namen und IDs sind vom Spielen und lassen sich zurzeit nicht wieder entfernen. Ursprünglich waren diese Felder leer, wie auch MY-, Stun- und Unstun-ID)
 Tone Set: EEA, CCIR, ZVEI2, ZVEI3, DZVE1, NATEL

Passwort für Testmode: TX130

Input the password:

OK Cancel

Test Mode

Low Power(Low)-(50)
 Low Power(Mid)-(50)
 Low Power(High)-(50)
 Mid Power(Low)-(50)
 Mid Power(Mid)-(50)
 Mid Power(High)-(50)
 High Power(Low)-(50)
 High Power(Mid)-(50)
 High Power(High)-(50)

◀ 50 ▶

Read All Write All Enter Adjust Mode

Open Data Save Data Cancel